




GRACO PROFESSIONAL CONTRACTOR EQUIPMENT



Hand Held Paint Sprayers

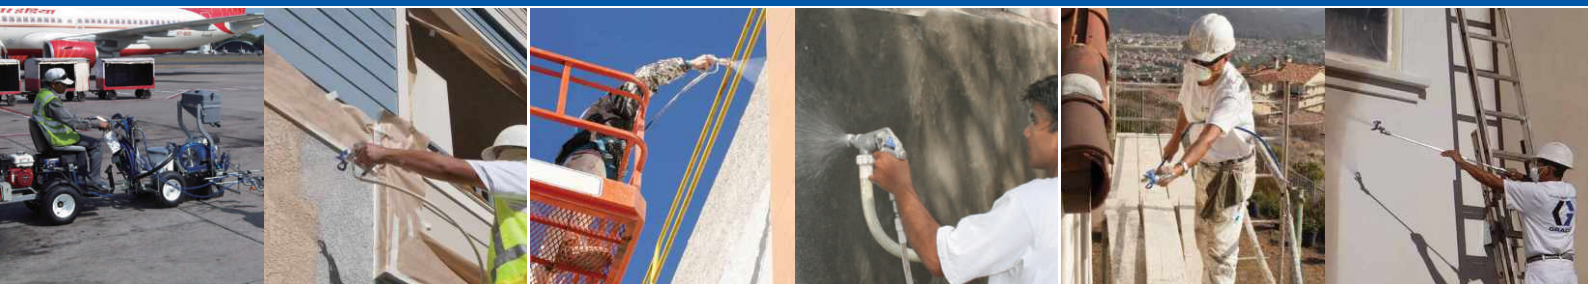

TrueCoat Pro-X-II Corded

- ♦ 0.011" - 0.017" Tip
- ♦ 1000 - 2000 Psi
- ♦ Electric Cord 15 ft



TrueCoat Pro-X-II Cordless

- ♦ 0.011" - 0.017" Tip
- ♦ 1000 - 2000 Psi
- ♦ (2) 20V Lithium-ion Rechargeable Battery



X Force HD

- ♦ 1.3 LPM
- ♦ 0.09" - 0.025" Tip
- ♦ 4000 Max Psi (276 BAR)
- ♦ (2) 28V HP Lithium-ion Rechargeable Battery

Electrical Airless Paint Sprayers



390PC Stand

- ♦ 0.021" Max Tip
- ♦ 1.8 LPM/5/8 HP (0.5 Kw)
- ♦ 3300 Psi (227 BAR)
- ♦ Supports up to 50ft hose / 1 Gun



490PC Pro Stand

- ♦ 0.023" MAX TIP
- ♦ 2.0 LPM / 1 HP (0.75 Kw)
- ♦ 3300 Psi (227 BAR)
- ♦ Supports up to 100 ft / 1 Gun



495PC Pro LoBoy

- ♦ 0.025" MAX TIP
- ♦ 2.3 LPM / 1.2 HP (1 Kw)
- ♦ 3300 Psi (227 BAR)
- ♦ Supports up to 150 ft / 1 Gun



UltraMax II 695 Hi-Boy Standard

- ♦ 0.031"(1 Gun)/0.023" (2 Guns)
- ♦ 3.6 LPM/2 HP (1.5 kw)
- ♦ 3300 Psi (227 BAR)
- ♦ Supports up to 200ft hose/2 Guns



UltraMax II 1095 ProContractor

- ♦ 0.035"(1 Gun)/0.021" (3 Guns)
- ♦ 4.5 LPM/2.4 HP (2 kw)
- ♦ 3300 Psi (227 BAR)
- ♦ Supports up to 300ft hose/3 Guns



Fast Pump Removal
1-minute jobsite replacement
Keeps you spraying instead of
waiting for service
No pins or parts to lose!

* All Electrical Sprayers come complete with: Gun, RAC X 517 Tip and Guard,
1/4 in x 50 ft (6.4 mm x 15.2 m) 3300 psi Hose



Petrol Operated Airless Paint Sprayers



GMAX 3900 Hi Boy Standard

- ♦ 0.036" (1 Gun)/0.025" (2 Guns)
- ♦ 4.7 LPM/4 HP Honda Engine
- ♦ 3300 MAX Psi (227 BAR)
- ♦ Supports up to 200ft hose/2 Guns



GMAX 7900 ProContractor

- ♦ 0.048" (1 Gun)/0.027" (3 Guns)
- ♦ 8.3 LPM/6.5 HP Honda Engine
- ♦ 3300 MAX Psi (227 BAR)
- ♦ Supports up to 300ft hose/3 Guns



Texture / Putty



TexSpray Hopper Gun

- ♦ 5.7 LPM
- ♦ 100 Psi (7 BAR) Max Pressure
- ♦ Includes 4,6,8,12 mm Nozzles



TexSpray RTX 1500

- ♦ 7.57 LPM
- ♦ 2 HP / 100 Psi MAX (7 BAR)
- ♦ Supports upto 50ft hose
- ♦ Hose Length depends on material



T-Max 506/657

- ♦ 6.4 / 7.2 LPM
- ♦ 2 / 2.4 HP Motor
- ♦ Supports upto 15/30 ft hose
- ♦ Max pressure 726 (50B)/ 928 (65B)



TexSpray 5900/7900 HD - Standard

- ♦ 6/8.3 LPM
- ♦ 0.043" / 0.048" MAX TIP
- ♦ 3300 Psi (227 BAR)
- ♦ Supports upto 100ft (Putty) hose
300 ft (Paint) hose



TexSpray DutyMax EH230 DI

- ♦ 5.9 LPM
- ♦ 0.039" MAX TIP
- ♦ 3300 Max Psi (227 BAR)
- ♦ Supports up to 100ft (Putty) hose
300 ft (Paint) hose



TexSpray HTX 2030 Complete/Complete Plus+

- ♦ 11 / 8.3 LPM
- ♦ 0.071" / 0.047" MAX TIP
- ♦ 1000 Max Psi (70B)/3300 (227B)
- ♦ Supports up to 50ft (Putty) hose
300 ft (Paint) hose



TexSpray Mark V/X

- ♦ 5.1 / 7.9 LPM
- ♦ 0.039" / 0.045" MAX TIP
- ♦ 3300 Max Psi (227 BAR)
- ♦ Supports up to 50ft (Putty) hose
300 ft (Paint) hose



Fine Finish Paint Sprayers



TrueCoat Pro-X FF Cordless

- ♦ 0.08" / 0.012" MAX TIP
- ♦ 500 - 1500 Max Psi
- ♦ 18 V Lithium-ion Battery



HVLP 9 / 9.5

- ♦ 4 / 5 Stage Turbine
- ♦ 9 / 9.5 Max Psi
- ♦ 3.1 / 2-3-4 Fluid Set



FP 395 PC

- ♦ 1.6 LPM
- ♦ 0.021" MAX TIP
- ♦ 7 / 8 HP / 1 HP Compressor
- ♦ 3300 Max Psi (227 BAR)

Pressure Washers



G-Force II 2525 DD

- ♦ 9.46 LPM
- ♦ 4.6 HP Honda Engine
- ♦ 2500 Max Psi (172 BAR)
- ♦ Supports upto 100ft hose




G-Force II 3032 DD

- ♦ 11.4 LPM
- ♦ 8.5 HP Honda Engine
- ♦ 3200 Max Psi (221 BAR)
- ♦ Supports upto 150ft hose




G-Force II 4040 DD

- ♦ 15.1 LPM
- ♦ 11.7 HP Honda Engine
- ♦ 4000 Max Psi (276 BAR)
- ♦ Supports upto 300ft hose

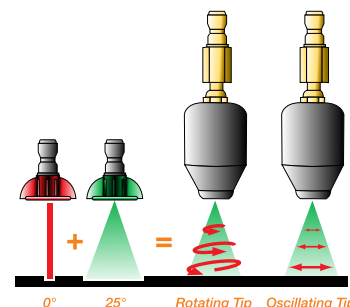


Line Lazer - Line Marking Machines

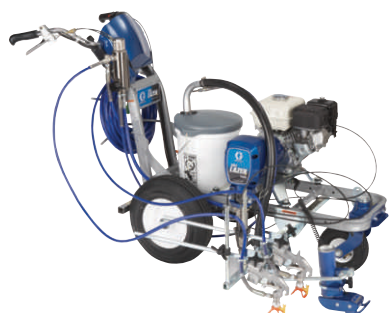

Line Lazer IV 3900/5900

- ♦ 4.7 / 6 LPM
- ♦ 3300 Max Psi (227 BAR)
- ♦ 1 Gun / 2 Guns System

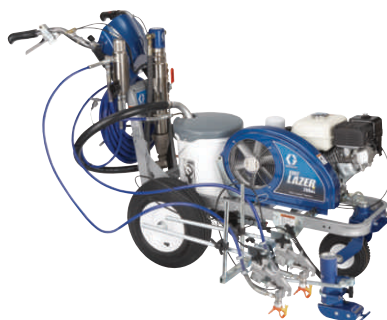

Line Lazer IV 200 HS

- ♦ 8.14 LPM
- ♦ 3300 Max Psi (227 BAR)
- ♦ 1 Gun / 2 Guns System



Line Driver/Line Driver HD

- ♦ 5.5 / 6.5 HP Honda Engine
- ♦ 11 / 16 Km / Hr



Express Series Sprayers



* 190 Express

- ◆ 1.8 LPM
- ◆ 0.021" MAX TIP
- ◆ 5 / 8 HP (0.5 kw)
- ◆ 3000 Max Psi (207 BAR)



** 690 Express

- ◆ 3.6 LPM
- ◆ 0.031" (1 Gun)/0.023 (2 Guns)
- ◆ 2 HP (1.5 kw)
- ◆ 3000 Max Psi (207 BAR)
- ◆ Supports up to 200ft hose/2 Guns



** 3900 Express

- ◆ 4.7 LPM
- ◆ 0.035" (1 Gun)/0.023 (2 Guns)
- ◆ 4 HP Honda Engine
- ◆ 3000 Max Psi (207 BAR)
- ◆ Supports up to 200ft hose/2 Guns



*** Mark IV Express

- ◆ 3.6 LPM
- ◆ 0.031" MAX TIP
- ◆ 2 HP (1.5 kw)
- ◆ 3000 Max Psi (207 BAR)
- ◆ Supports up to 200ft hose/2 Guns


* Comes complete with: SG3™ Gun, RAC™ IV 517 SwitchTip™ & Guard, 1/4 in x 25 ft (6.4 mm x 7.5 m), DuraFlex Airless Hose

** Comes complete with: SG3™ Gun, RAC™ IV 517 SwitchTip™ & Guard, 1/4 in x 50 ft (6.4 mm x 7.5 m), DuraFlex Airless Hose

*** Comes complete with: Flex Plus Gun, RAC V 425 SwitchTip and Guard, 3/8 in x 50 ft (9.5 mm x 15 m), DuraFlex Airless Hose, 1/3 in x 3 ft (6.4 mm x 0.9 m) Whip Hose

Aiming the Spray Pattern

Hold the spray gun approximately 12 in (30 cm) from the surface, and aim it straight (both horizontally and vertically) at the surface. Extremely large tips will require you to move further away to achieve a good spray pattern.



Overlapping Technique



In order to spray an even coating, aim the spray gun so that the tip points at the edge of the previous stroke, and overlap each stroke by 50%. To maximize efficiency when spraying wide surfaces such as ceilings and walls, spray the outside edges first, then spray the middle of the surface, thus allowing you to work more quickly.

Airless Spray Tips

Selecting the correct spray tip for the job is an important decision, as it plays a big role in the quality of your finish.

An airless spray tip:

- Determines the fluid flow – the amount of coating applied
- Determines the spray pattern (fan width)

Did you know?

Graco uses a color-coding system to identify tip types.

- General SwitchTips are blue or black
- Fine Finish tips are green
- LineLazer tips are yellow



Breaking the Code:

XXX - 515

First digit when multiplied by 5, equals spray pattern fan width. A 515 has a 25 cm (10 in) fan width when sprayed 30 cm (12 in) from surface.
5 x 2 = 10 in (25 cm)

Last two digits are orifice size in thousandths of an inch. This determines the amount of coatings applied. A 515 has a 0.015 inch orifice (.038 cm).

Graco India Office Address

Room 443, Level 4, Augusta Point, Golf Course Road, Gurgaon, Haryana, India 122 001. Tel: +91 124 435 4030

Mob. : +91 97699 25914 / +91 98101 50374. Email : Denzil_D'costa@graco.com / Yuvraj_Mathur@graco.com

Website : www.graco.com

